



Dr. Höne AG – EPSA 240

Electronic Power Supply

System-Features

- 24 kW maximum power
- Continuously variable power control
- Service- and installation-friendly due to plugable connections
- Small space required/reduced footprint

Advantages

- High lamp voltage
- High efficiency
- Reduction of production costs
- Improved reignition
- Longer lamp life
- Good cost/performance ratio

EPSA 240 - Electronic Power Supply

The **EPSA 240** is an electronic power supply for UV discharge lamps with a maximum power of 24 kW.

Features



The **square-wave power output of the EPSA effects a greater UV yield** at the same electrical power compared to the **sinusoidal power output of a conventional transformer/choke ballast**.

Additional features

- **Continuously variable power control**, application dependent between 11% and 100%
- Integrated ignitor
- Improved lamp reignition compared to conventional technology
- Compact and lightweight design
- Less weight compared to a conventional power supply
- Service-friendly due to pluggable connections

Technical Data

Maximum power output	24 kW
Lamp voltage	max. 1,900 V
Mains supply	3x 400 - 480 V ($\pm 10\%$), 50/60 Hz
Power control	11 - 100 % bei analog signal 1,1 - 10 V DC application dependent
Control	analog / digital fieldbus
Efficiency η	typ. 96 %
Power factor $\cos \varphi$	> 0,9
Dimensions (l x w x h)	460 x 305 x 165 mm
Bus interfaces (optional)	CANopen, Modbus

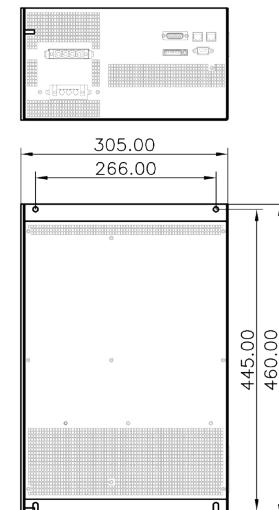

hönle group

Curing Drying Bonding Potting Measuring

eleco panacol-edf eltosch grafix gepa coating hönle panacol printconcept raesch uv-technik speziallampen



Dr. Höne AG UV Technology, Lochhamer Schlag 1, 82166 Gräfelfing/München, Germany
Phone: +49 89 85608-0, Fax: +49 89 85608-148. www.hoenle.de

Operating parameters depend on production characteristics and may differ from the foregoing information.
We reserve the right to modify technical data. © Copyright Dr. Höne AG. Updated 04/20.